


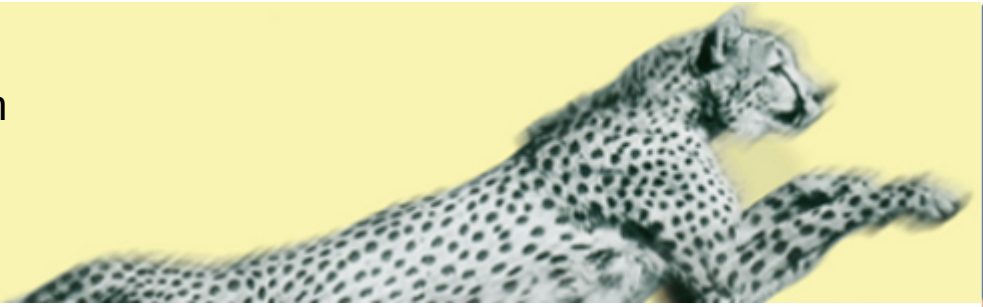

EXPERT SE

Industrial PC - EXPERT 1900 SE SXGA iC T - stationary

Industrial PC » stationary » EXPERT SE »

The different designs of the EXPERT series by FORSIS develop areas which require feedback stations under the most extreme application conditions. Protection class IP65 is a necessary prerequisite. Compliance with hygiene standards and operation at a wider temperature range are required in addition to leak tightness. The EXPERT SE-series forms another important component of the EXPERT family.

The features of the SE series are:

- Tight according to protection class IP68.
- LCD sizes up to 21.5"
- Plug exit downwards
- Cable exit protected according to IP65 - no soldering work.
- Many standard interfaces are available.

Integration of special features such as heating elements for the deep-freeze area possible

Stainless steel housing

IP-class front IP69k, connections IP65

CPU i-Cel 1047UE 2x1,4 GHz, 4GB RAM, SSD 128GB MLC

19" LCD TFT, 1280x1024, resistive touchscreen

2x RS232, 2x USB 2.0, 2x USB 3.0, 2x GbE

DisplayPort, VGA, Mini PCIe fullsize / halfsize

Working temperature: -5°C to 45°C

Power supply: 230V AC, 60 VA, internal

Cable outlet: protected/ below

Mounting: side / threaded holes

WxHxD: 480x415x130 mm, 14 kg

Specification

Device specification		
material:	material	V2A / V4A
surface: outside,	outside	brushed
	inside	polished
Weight	kg	14
dimensions WxHxD (mm):	AbB	480
	AbH	415
	Abi	130
Man-Machine-Interface		
LCD	Diagonal (")	19
	Resolution	SXGA
	Pixel	1280 x 1024
Touchscreen	Technology	analog resisitiv
PC-System specification		
CPU	Name	Intel® Celeron™ 1047UE
	# of Cores	2
	Frequency (GHz)	1,4
	Fan	●
RAM	Standard (GB)	4
	Maximum (GB)	8
Mass storage	SSD (GB)	128
	HDD (GB)	○
	CF (GB)	○
Interfaces externally		
Serial	RS232	2
	RS422/485	○
USB	USB 2.0	2
	USB 3.0	2
Monitor connections	DisplayPort	1
	HDMI	1
	DVI	-
	VGA	1
Ethernet	1000 Mbit/s	2
	100 Mbit/s	-
Mouse/Keyboard		-
Slots		
PCI104		-
ISA		-
PCI		-
Mini PCIe	Full size	1



	Half size	1
environmental conditions:		
temperatue range:	°C	-5°C bis 45°C
non-condensing humidity:	%	0-95
Approvals		CE
Power supply		
Input voltage	V	230
Input current	Kind	AC
Power consumption	W	60
Safety class		
Front	IP	69k
interface	IP	65
cable outlet		
protected		○
Cable strain relief,		○
lead downwards		below
assembly points:		
Mounting bracket set for desk and		●
Rear	VESA 100	-
operating Systems		
Windows	Windows CE	-
	Windows Embedded 7	○
	Windows Embedded 8	○
	Windows 10 IoT	-
	Windows 7	○
	Windows 8	○
	Windows 10	-
IGEL		○
extension		
Wireless	wireless	○
	Bluetooth	○
Mobile Web	UMTS/LTE	○
RFID		○
windshield		○
Sound		-
USV		-
heating		-



Gallery



EXPERT-SE-front2.jpg



EXPERT-SE-Interface-open.jpg



EXPERT-SE-Interface-protect.jpg



EXPERT-SE-Interface-close.jpg



Expert-SE-PG.jpg



EXPERT-SE-front.jpg



expert-bs-griff.jpg

Für weitere Informationen stehen wir gerne zur Verfügung

D	FORSIS GmbH	Schwanenstr. 5	88214	Ravensburg	T	+49	(0) 751 76414 363	info@forsis.de	www.forsis.de
		An der Straßenbahn 10	31157	Sarstedt / H	T		(0) 5066 90229 160		
CH	FORSIS Schweiz GmbH	Solothurnstr. 154	2504	Biel	T	+41	(0) 32 333 1073	info@forsis.ch	www.forsis.ch
A	FORSIS Österreich GmbH	Höchstler Str. 24	6850	Dornbirn	T	+43	(0) 5572 3727 09	info@forsis.at	www.forsis.at
NL	RBK Automatisierung bv	Keulenstraat 18	7418	ET Deventer	T	+31	(0) 570 680 116	info@forsis-nl.nl	www.forsis-nl.nl
S	AceIQ AB	Stridsvagnsvägen	29139	Kristianstad	T	+46	(0) 763 18 42 18	info@aceiq.com	www.aceiq.com



FORSIS® Die Marke für Industrie PCs

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhaltes ist nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlung verpflichtet zu Schadenersatz. Alle Rechte vorbehalten. Technische Änderungen sind möglich.

